



Cotswold
TRADE ALUMINIUM


smart
architectural aluminium

Aliver Rooflight

Bringing natural light into the home all year round, the high-performance, high quality Aliver Rooflight system is a fixed, flat solution which creates a contemporary look for any property.

Providing exceptional thermal insulation, light transmission and noise reduction, the system has been designed to accept both double and triple glazed units.

Featuring an elegant and unobtrusive aluminium frame and a unique, concealed fixing system which makes the rooflight fast and easy to install, the system has also been designed such that the glazing unit may be taken out of the frame and replaced, without the frame itself having to be removed, providing a durable, cost-effective and long-life solution.

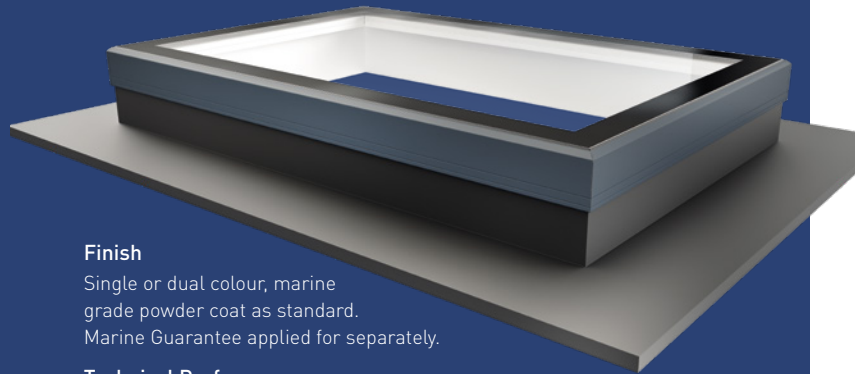

Finish

Single or dual colour, marine grade powder coat as standard. Marine Guarantee applied for separately.

Technical Performance

U Value 1.4W/m²K using 1.0W/m²K centre pane glass unit

Design Limitations

The below limitations are a guide only based on a maximum glass unit thickness of 29mm. We recommend the glass unit design limitations be confirmed with the glass supplier.

Glass

28.8mm to 29mm sealed units

Rectangular Size Limits

Max Length 2000mm

Max Width 1000mm

Square Size Limits

Length 1500mm

Max Width 1500mm

Rooflight glazing must comply with the standards set by BS EN 1991-1-1 & CWCT TN61-TN69 depending on the roof light application and requirements. Please liaise with your glass supplier for specification.



BES 668681



FM21582



EMS554307



OHS571955



ENMS634370

