


Customer:	Order Reference:
Address:	Delivery / shipping address:
Postcode:	Postcode:
Contact Name:	Delivery Contact:
E-mail:	Delivery Telephone:
Telephone:	Date:

**** Default selections are underlined>****

Single colour <input type="checkbox"/> Dual-Colour <input type="checkbox"/> ⇒	Outside:	<u>Matt</u> <input type="checkbox"/> Satin <input type="checkbox"/> Gloss <input type="checkbox"/>
	Inside:	Marine/ Swimming pool spec. Yes <input type="checkbox"/> <u>No</u> <input type="checkbox"/>
Int. Handles: <u>Std. L-S Lever locking</u> <input type="checkbox"/> Std. L-S Lever Non locking <input type="checkbox"/> Ext. Handles: <u>Std. Recessed Grip</u> <input type="checkbox"/> No ext. handles <input type="checkbox"/> Std. L-S Lever locking <input type="checkbox"/> Std. L-S Lever Non locking <input type="checkbox"/>	Handle colour: <u>Black</u> <input type="checkbox"/> White <input type="checkbox"/> Silver anodised <input type="checkbox"/> Frame Colour <input type="checkbox"/>	Cylinders: <u>Standard</u> <input type="checkbox"/> 3-star Security * <input type="checkbox"/> <u>Key & Key</u> <input type="checkbox"/> Key & Thumb turn <input type="checkbox"/> <u>Key differ</u> <input type="checkbox"/> Keyed-a-like <input type="checkbox"/> without/own cylinder <input type="checkbox"/>
Trickle ventilators: <u>No</u> <input type="checkbox"/> Yes <input type="checkbox"/> ⇒	Glazed-in ventilator (4103mm ² /m 45mm glass deduction vent per field) Black <input type="checkbox"/> White <input type="checkbox"/> RAL <input type="checkbox"/> Slot vent within head of inner sliding sash: Black <input type="checkbox"/> White <input type="checkbox"/> 2500mm ² (<700mm) <input type="checkbox"/> 5000mm ² (>700mm) <input type="checkbox"/>	
Glass: <u>Unglazed</u> <input type="checkbox"/> Glazed <input type="checkbox"/> ⇒ Prepared for: <u>28mm</u> <input type="checkbox"/> 32mm <input type="checkbox"/> 40mm <input type="checkbox"/>	TSG Low E Argon thermal spacer black (U= 1.2): 2x4mm <input type="checkbox"/> 2x6mm <input type="checkbox"/> *TSG & LSG Low E Argon thermal spacer black (U= 1.2): 6.4mm+4mm <input type="checkbox"/> 6.4mm+6mm <input type="checkbox"/>	

Design & Section details:

- Outer frame (standard 99mm 2-trk), 2. Outer frame (standard 166mm 3-trk), 3. Outer frame (standard + upstand 118mm 2-trk), 4. Outer frame (standard + upstand 184mm 3-trk),
5. Standard 99mm 2-trk frame with cill options, 6. Standard 99mm frame typical head / jamb, 7. Standard 99mm interlock lxx 67cm4 (shadow – optional reinforcing = lxx 137mm4),
8. (2 PANE ONLY) Slim 35mm interlock lxx 73cm4 (shadow- optional extended external reinforcing = lxx 182mm, 9. Standard centre parting locking mullion lxx 70mm4.

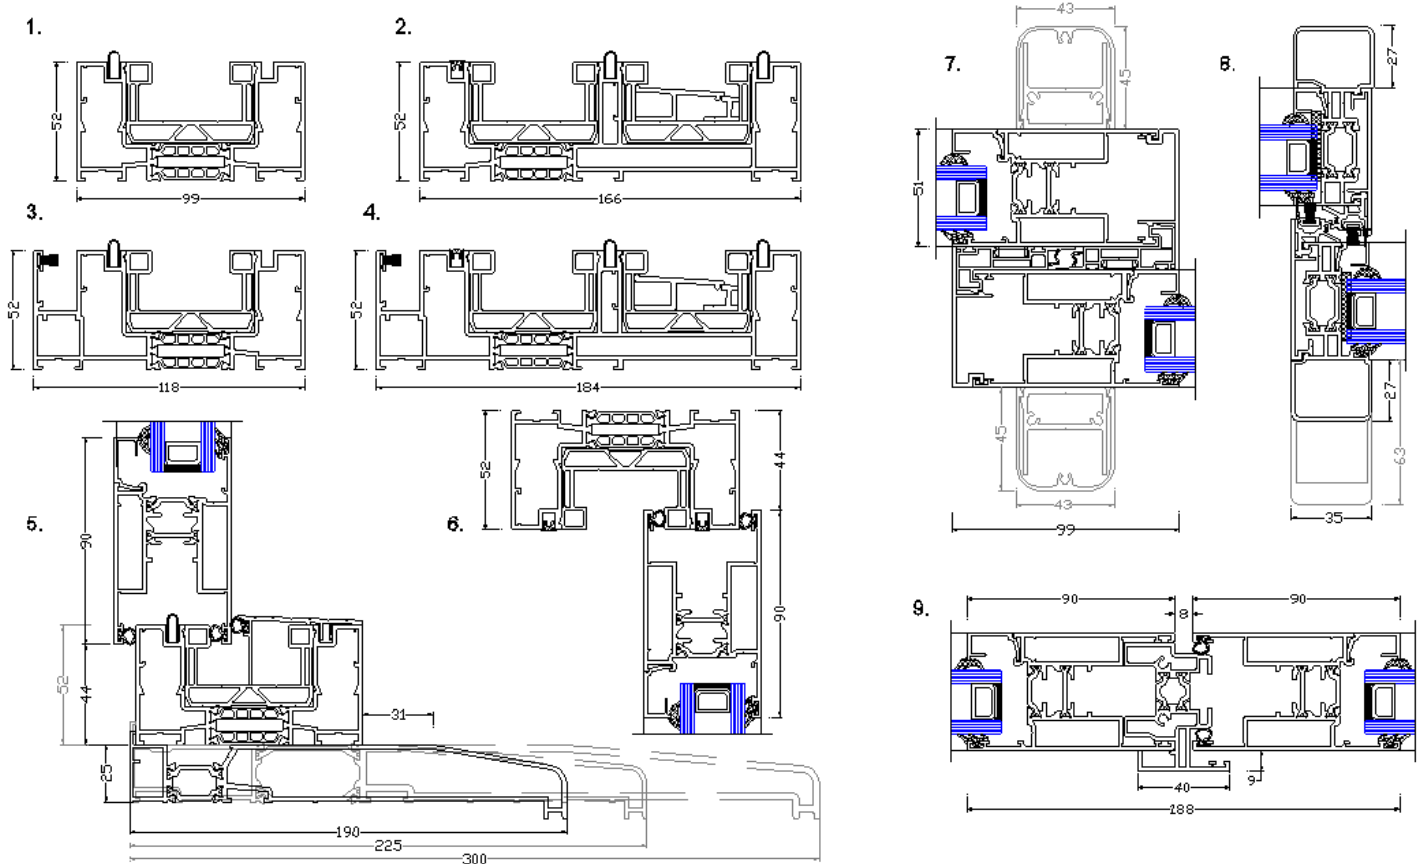

LIFT-AND-SLIDE sash limits:
Width [Min./Max.]: 702mm / 3294mm
Height [Min./Max.]: 1718mm / 2500mm
Maximum Weight: 200kg

Performance:
Air Permeability: Class 3 | Watertightness: Class 7A
Based upon sash limits: width max. 2000mm x height max. 2400mm
(2-pane door set / 3-pane (2 L-S) door set)

Ultraslim SDS (LIFT-AND-SLIDE)

ORDER FORM QUOTATION

Please e-mail to: pricing@cotswoldtradealuminium.co.uk



Item Loc.	Style (Viewed Outside) (Please indicate master/ slave sash, T/vents & point to hinge!)	Qty	Size (mm) (Overall inc. all add-ons & cills)	Frame: (Please select)	Glazing (Clear/Satin /Bars/Panel)	Special / Notes
				Interlock: (Please select)		
				Cill (Please select)		

			Width	99mm 2-trk	118mm 2trk + Upstand		
				166mm 3-trk	184mm 3-trk + Upstand		
				99mm Std	35mm Std		
			Height	99mm Std + Reinforcing	35mm Std + Reinforcing		
				None	190 (2-trk)		
				225 (2-trk)	300 (3-trk)		

			Width	99mm 2-trk	118mm 2trk + Upstand		
				166mm 3-trk	184mm 3-trk + Upstand		
				99mm Std	35mm Std		
			Height	99mm Std + Reinforcing	35mm Std + Reinforcing		
				None	190 (2-trk)		
				225 (2-trk)	300 (3-trk)		

			Width	99mm 2-trk	118mm 2trk + Upstand		
				166mm 3-trk	184mm 3-trk + Upstand		
				99mm Std	35mm Std		
			Height	99mm Std + Reinforcing	35mm Std + Reinforcing		
				None	190 (2-trk)		
				225 (2-trk)	300 (3-trk)		

			Width	99mm 2-trk	118mm 2trk + Upstand		
				166mm 3-trk	184mm 3-trk + Upstand		
				99mm Std	35mm Std		
			Height	99mm Std + Reinforcing	35mm Std + Reinforcing		
				None	190 (2-trk)		
				225 (2-trk)	300 (3-trk)		